

FULLY OUTDOOR DIGITAL SIGNAGE

S Series



IP Rating



High Brightness



Ultra Thin



Four Seasons





Horizontal & vertical



Tempered Glass

CDS offers a premium outdoor digital signage solution with a high-brightness LCD display, integrated high-temperature LCD, self-cooling design, and AG coating glass for enhanced visibility. This signage is easy to integrate into custom frames and doesn't require additional waterproofing or cooling measures, making it an excellent choice for outdoor advertising needs.

INSTALLATION METHODS

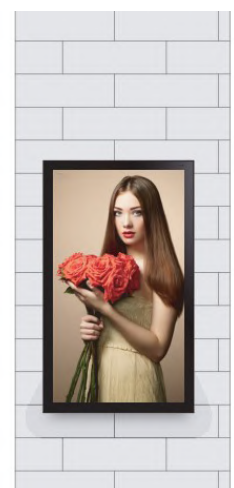

Technical Specifications

LCD Display

Size	65	75
Active Display Area (H x V mm)	1428.48 x 803.52	1649.664 x 927.936
Resolution	3840 x 2160	3840 x 2160
Brightness	2500 nits	3000 nits
Aspect Ratio	16 : 9	
Backlight Adjustment	Automatic (Ambient Light Sensor)	
Viewing Angle	178°/178°	
Backlight Configuration	Direct LED	
Operation Life (hours)	50,000	

Mechanical

Enclosure Material	Galvanized Steel + Aluminum
Finishing	Zinc Powder Coating + Fine Grain Powder Coating
Colour	Black (Ral 9005)
Glass	AG Coating Tempered Glass, Back Painted Pantone Black C

Power

AC Input	110~220VAC±10% , 50 / 60 Hz
Power Consumption	425w 580w

Environment

IP Rating	IP66
Operating Environment	Fully Outdoor
Operating Temperature	-20°C~50°C
Operating Humidity	5%~98%
Operating Altitude	≤ 2000m

Media

(HDMI In) Standard

HDMI Input	HDMI (x 1), 480i, 480p, 720p, 1080i , 1080p , 2160p
Analog Audio Output	3.5mm Headphone Jack (x1)

Certificate



CE-EMC
CE-LVD
ROHS
IP66
IK08

Optional

Touch
Android
Computer
Camera
NFC
RFID
Ultrasonic sensor

Mechanical

W x H x D	902 x 1527 x 104 mm	1027x1748.5x104 mm
Net Weight	112kg	137kg





FULLY OUTDOOR DIGITAL SIGNAGE


E Series



IP Rating



High Brightness



Ultra Thin



Four Seasons




Horizontal & vertical



Tempered Glass

CDS offers a premium outdoor digital signage solution with a high-brightness LCD display, integrated high-temperature LCD, self-cooling design, and AG coating glass for enhanced visibility. This signage is easy to integrate into custom frames and doesn't require additional waterproofing or cooling measures, making it an excellent choice for outdoor advertising needs.

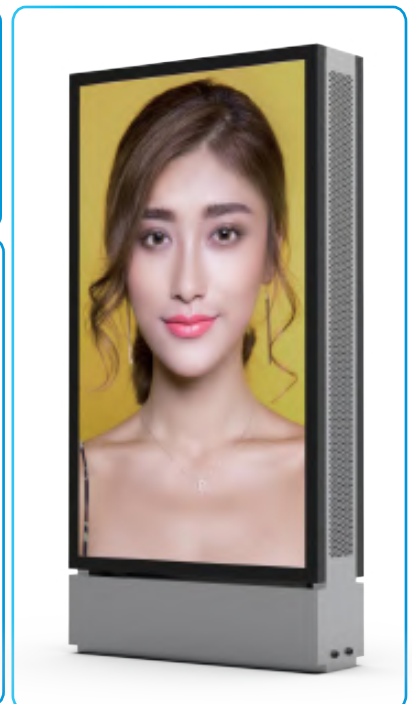

Technical Specifications

LCD Display

Size	32	43	49	55
Active Display Area (H x V mm)	698.4 x 392.85	940.896 x 529.254	1075 x 606.5	1209.6 x 680.4
Resolution	1920 x 1080	1920 x 1080	1920 x 1080	1920 x 1080
Brightness	2000 nits	2500 nits	4000 nits	4500 nits
Aspect Ratio	16 : 9			
Backlight Adjustment	Automatic (Ambient Light Sensor)			
Viewing Angle	178°/178°			
Backlight Configuration	Direct LED			
Operation Life (hours)	50,000			

Certificate

CE-EMC
CE-LVD
ROHS
IP66
IK08

Mechanical

Enclosure Material	Aluminum
Finishing	Fine Grain Powder Coating
Colour	Black (Ral 9005)
Glass	Tempered Glass,Back Painted Pantone Black C

Optional

Touch
Android
Computer
Camera
NFC
RFID
Ultrasonic sensor

Power

AC Input	110 VAC / 220 VAC±10% , 50 to 60 Hz			
Power Consumption	105w	200w	280w	325w

Environment

IP Rating	IP66
Operating Environment	Fully Outdoor
Operating Temperature	-20°C~50°C
Operating Humidity	5%~98%
Operating Altitude	≤ 2000m




Media

(HDMI In) Standard

HDMI Input	HDMI (x 1), 480i, 480p, 720p, 1080i , 1080p , 2160p
Analog Audio Output	3.5mm Headphone Jack (x1)

Mechanical

W x H x D	795 x 489.5 x 96 mm	1037.5 x 626 x 98 mm	703.5 x 1172 x 98 mm	1306 x 777 x 95.8 mm
Net Weight	22kg	35kg	41kg	50kg



Need any additional information?

If you need any assistance with pricing information, technical support or require any additional information our team would be more than happy to assist



CONTACT US:

Crystal Display Systems Ltd
Unit 6 M2M Park, Fort Bridgewood
Maidstone Road, Rochester,
Kent. ME1 3DQ

T : +44(0) 1634 791600

E : info@crystal-display.com

W : crystal-display.com

SPECIALIST GLOBAL SUPPLIERS IN INNOVATIVE LCD
DISPLAY, TOUCH AND DIGITAL SIGNAGE SOLUTIONS

E&OE - Specifications may be subject to change without prior notice