

SPECIFICATION

MO-332-002-SQ-500-V/PT

33.2" Digital Signage Square Monitor with PCAP Touch

Date 08.04.2022

www.crystal-display.com

www.crystal-digitalsignage.com

FOR INDUSTRIAL DISPLAY SOLUTIONS

FOR DIGITAL SIGNAGE SOLUTIONS

TECHNICAL DATASHEET

MO-332-002-SQ-500-V/PT

33.2" Digital Signage Square Monitor with PCAP Touch

33.2" Square LCD, 1920 x 1920, 500 nits




FEATURES

- 33.2" Square LCD Monitor
- 1920 x 1920 Resolution
- 500 cd/m² Brightness
- High Contrast Ratio
- Wide Viewing Angle LCD panel
- High Efficiency LED Backlight
- Optional Touchscreen Available

TECHNICAL SPECIFICATION

Model		MO-332-002-SQ-500-V/PT
LCD	LCD Size	33.2"
	Display Resolution	1920x1920
	Display Area	597.6 mm x 597.6 mm
	Aspect Ratio	1:1
	Brightness	500 cd/m ²
	Contrast	1000 :1
	Colour	16.7M
	Response Time	8ms
	Backlight Life Cycle	≥30,000 hours
	Viewing Angle	89° /89° /89° /89°
	Power	Inbuilt AC input
LCD Monitor	I/O ports	HDMI*1/DVI*1/VGA*1/DP*1
Interactive	Touch	PCAP, 10 points
Performance	Working Temperature	0°C~50°C
	Working Humidity	55±20%
	Storage Temperature	-20°C~65°C
	Storage Humidity	<90%
Dimensions	Net Size	643mm x 643mm x 47mm
Others	Accessories	Power Cable, Optional Speaker

TECHNICAL DRAWING

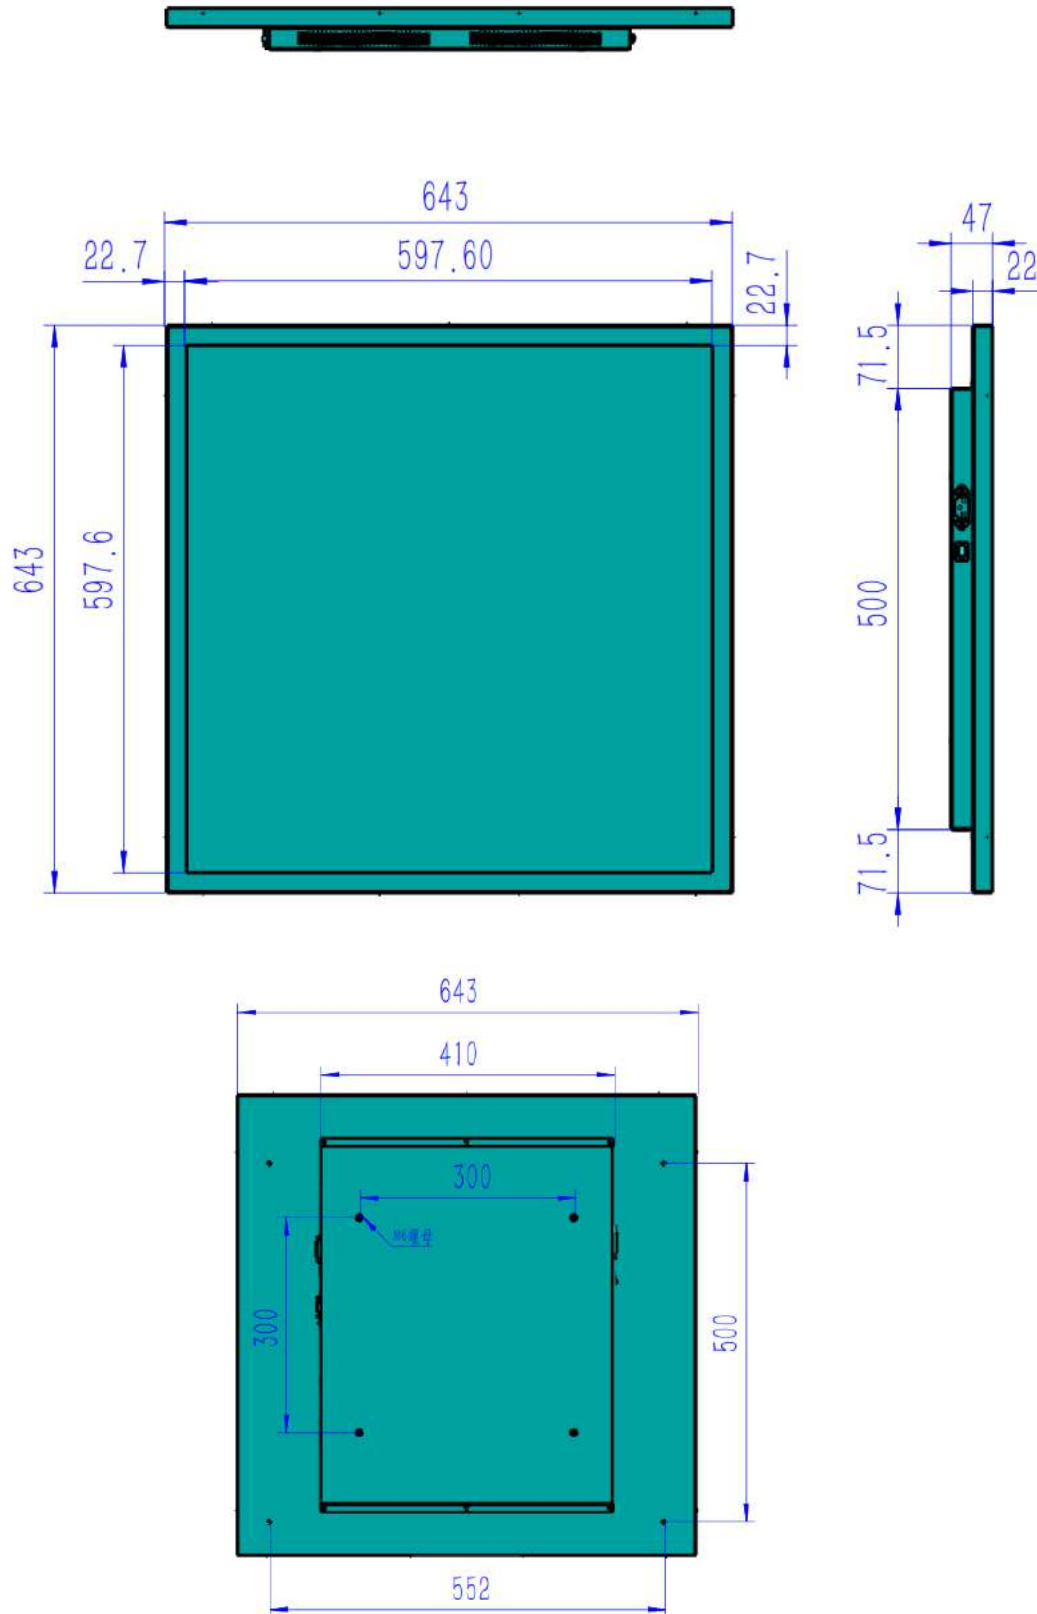

Need any additional information?

If you need any assistance with pricing information, technical support or require any additional information our team would be more than happy to assist.



CONTACT US:

Crystal Display Systems Ltd
Unit 6 M2M Park, Fort Bridgewood,
Maidstone Road, Rochester, Kent
ME1 3DQ
United Kingdom

T: +44 (0) 1634 791600
E: info@crystal-display.com
W: crystal-display.com
www.crystal-digitalsignage.com

**SPECIALIST GLOBAL SUPPLIERS IN INNOVATIVE LCD
DISPLAY SOLUTIONS AND DIGITAL SIGNAGE SOLUTIONS**

*E & OE. Specifications may be subject to change without prior notice

More information can be found at:

<https://crystal-display.com/>